


- ✓ **Customize to your needs**
- ✓ **Quality craftsmanship**

Design your personal high pressure wand. Simply choose the in-pu-put, length, grip and matching accessories to suit your needs. Follow the steps 1, 2 and 3 to get the correct part number.

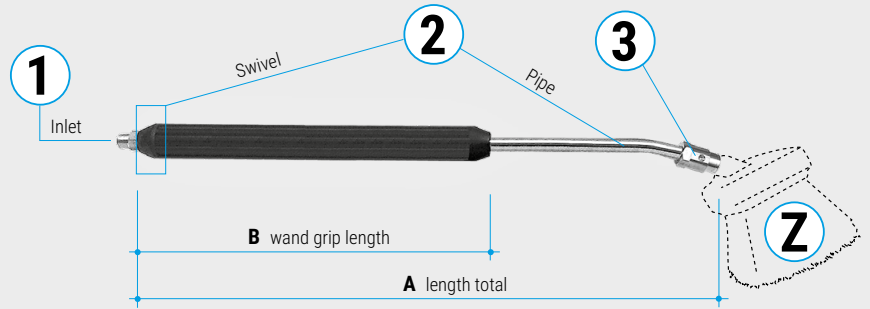

1	Inlet	No.
	M21 x 1.5 F	21.
	M22 x 1.5 F	22.
	3/8" NPTM conical	25.
	1/4" NPTM conical	26.

2	Pipe straight		Pipe bent	
			without Swivel	with Swivel
	A	B	No.	No.
Other versions or sizes upon request	10"	8"	01	41
	14"	8"	02	42
	20"	8"	03	43
	26"	16"	04	44
	30"	16"	05	45
	34"	16"	06	46
	34"	32"	07	47
	38"	16"	08	48
	38"	32"	09	49
	41"	16"	10	50
	41"	32"	11	51
	50"	40"	12	52
	60"	51"	13	53
	70"	51"	14	54
	80"	72"	15	55

Your Part No.



3	Outlet	No.
	Nozzle socket 1/8"NPTF for locking-screw	0
	Nozzle socket 1/8"NPTF for snap-lock	1
	Nozzle socket 1/4"NPTF for locking-screw	2
	Nozzle socket 1/4"NPTF for snap-lock	3
	R1/4" M (R=conical)	4
	Foam injector ø0.1" R1/4" M (R=conical)	5
	Nozzle socket G3/8" M 1/8"NPTF	6
	Nozzle socket ø0.63" 1/4"NPTF	7
	HP-Coupling ø0.47"	8

Z	Suitable Accessories
29.001	
29.002	
29.003	
29.006	
29.007	
29.010	
70.025	
70.026	
904.842	

Nozzles not included.

Legend

M.. = metric thrust, ..M = male, F = female, G = gas pipe thrust, R = gas pipe thrust conical, QV = quick connects, SV = profile ring fitting
 D = diameter, L = length, NW = nominal width, SW = wrench size, IN = media input, OUT = media output, RS = basic position