

TD - 80772 A


FL-CR 750



Commercial Surface Cleaner

Technical Data

Pressure	4000psi (27.5Mpa)
Temperature	250°F
RPM	max. 2000 rpm
Housing	ø30"
Water connection	3/8"NPTF
Nozzle connection	3x 1/8"NPTF
Throughput medium	water (pH 3-12)

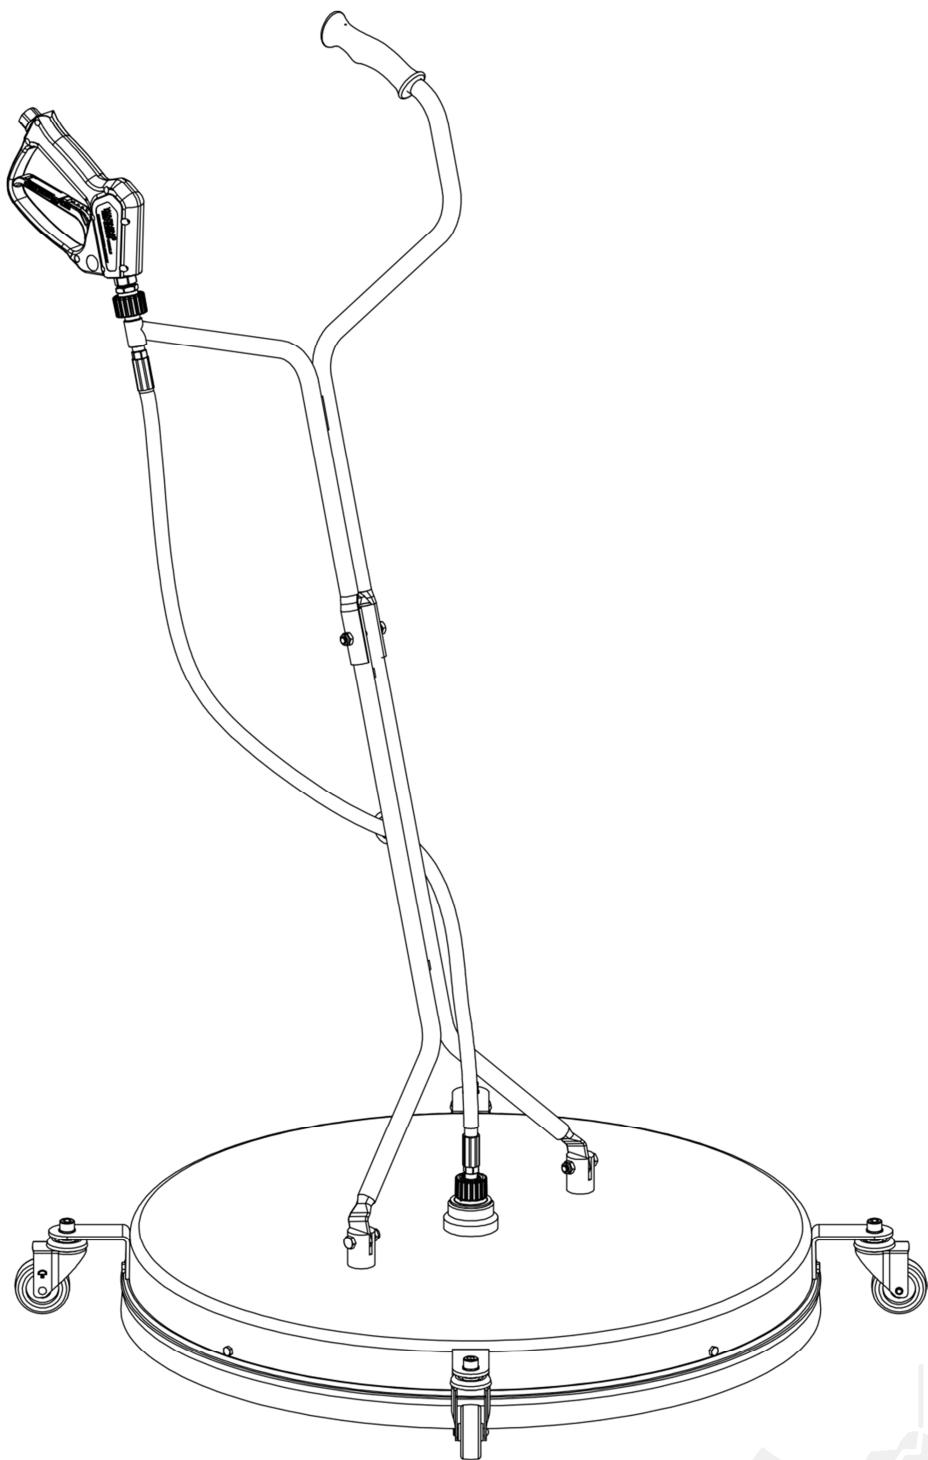

Commercial Surface Cleaner

Indication (original language German):

- Read all instructions, check overall conditions and safety requirements before initial operation of the product.
- Our product should only be installed by experienced users of high pressure equipment.
- Safety regulations and guidelines (Accident Prevention Rules) from the manufacturer of your high pressure cleaner are applicable.
- Nozzle installation according to Nozzle manufacturer.
- Do not move the product over objects or uneven surfaces.
- Do not run the product if the rotor-arm is out of balance or bent, damage to the swivel will result.
- No modifications to the product are permitted.

⚠ Caution:

- Always use protection gear when using products connected to high pressure.
- Before any maintenance or nozzle-change, turn off the high pressure water supply, e.g.: turn off and secure the power switch.
- After turning off the system, allow all selfpropelled equipment to come to a complete stop before handling. Risk of injury due the rotor-arm.
- Do not lift up the product while operating.

⚠ Warning:

- Never direct any high pressure water-jet at humans, animals or electric installations.
- Do not touch the rotor-arm during operation. Risk of injury.



Declaration of Conformity

Pressure Equipment Directive 97/23/EC Annex III.

Manufacturer:

Mosmatic AG
Oberhelfenschwilerstrasse 6
CH - 9126 Necker
Switzerland
Phone: +41 (0) 71 375 64 64
Internet: www.mosmatic.com

We hereby declare that the product listed below based on the conception, design and construction in the design as we launch the product, conclusively at the time of the declaration applicable alterations, conforms to the safety requirements of the Pressure Equipment Directive.

Product Description: High Pressure Accessories

Type: FL / DR / SPI / TYR / WB / HUR

Product Characteristics: Pressure Equipment Directive 97/23/EC
Article 3 / Number 1.3 / Letter a) / Second dash
Article 3 / Number 1.3 / Letter b) / Second dash
Fluid Group 2

Applied Conformity Assessment Procedure: Directive 97/23/EC Module H (Full Quality Assurance)

EC Standard Guidelines: Machinery Directive 2006/42/EG
Pressure Equipment Directive 97/23/EC

Applied Harmonized Standards: ISO 12100:2011 - Safety of Machinery
ISO 9001:2008 - Quality Management System

Authorised Person: Patrick Rieben

By any modification from the product, alterations on the product or the fitting of non-approved spares is the validity of the declaration of conformity with immediately effective terminated.

Necker, 2016


Signature:

TD - 80772 A

FL-CR 750

mosmatic 

Commercial Surface Cleaner

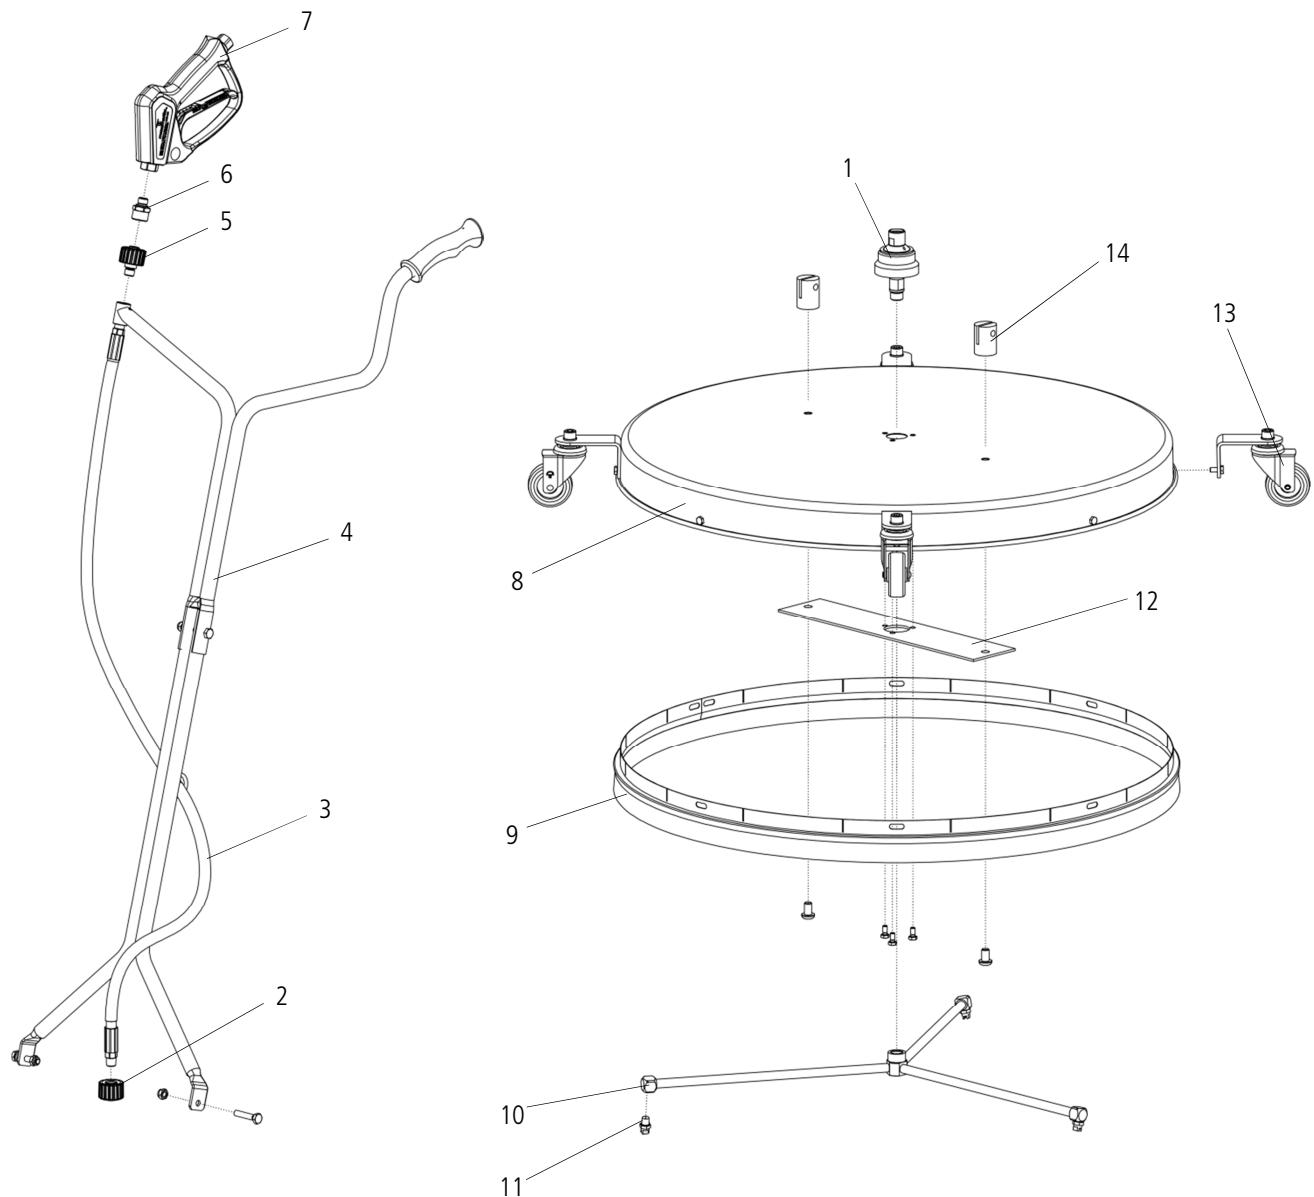

Spare parts list

Pos.	Art. Nr.	Description
1	55.253	Swivel (DYCI)
2	50.155	Quick-Connect (G1/4" F / M22x1.5-F)
3	901.953	HP-hose (R1/4" M / R1/4" M)
4	904.985	Fork cpl. without hose + gun
5	50.903	Quick-Connect (M22x1.5-F / G1/4" M)
6	51.278	Adapter (M22x1.5-M / 1/4" NPTM)
7	29.081	HP-gun (5000psi)
8	901.661	Cover
9	80.993	Brush ring replacement-kit
10	82.943	Rotor arm (ø27.5")
11	1503	HP-nozzle (1503)
12	900.958	Reinforcement plate
13	80.972	Caster (ø2.4") replacement-kit
14	80.992	Fork holder replacement-kit